


For steady connections

Braiding machines for ropes and textile applications.

SE 1/12-1088

**Rope braiding machine
for 60 – 130mm diameter**

- 12 carriers
- Take-off: 2 grooved discs, 1000mm diameter
- Bobbin size 560 x 900mm = 154615ccm
- Motor power: 11,0kw
- Speed: 24r.p.m.
- Noise level: < 90dB

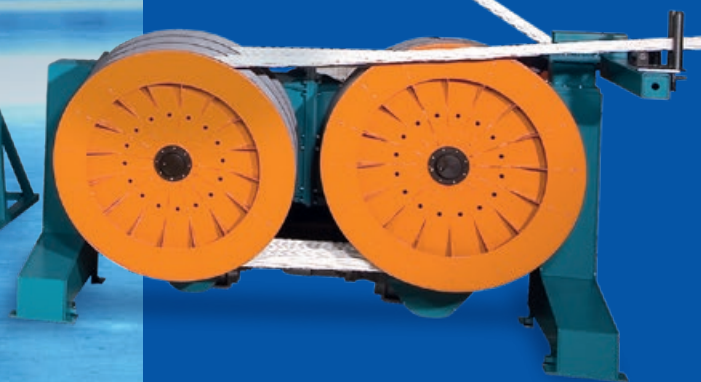

ST 6/3-80

Soutache braiding machine

- 6 heads, 3 carriers per head
- 3-roller take-off
- Bobbin size 55 x 130mm = 268ccm
- Motor power: 0,25kw
- Speed: 220r.p.m.
- Noise level: < 80dB



SP 2/1/12-105

Spiral braiding machine for 3 – 12mm diameter

- 2 heads, 12 carriers per head
- Take-off disc: 160mm diameter
- Bobbin size 78 x 280mm = 1211ccm
- Motor power: 0,37kw per head
- Speed: 225r.p.m.
- Noise level: < 85dB

NG 2/1/16-120

Circular braiding machine for 1 – 8mm diameter

- 2 heads, 16 carriers per head
- Take-off disc: 95,5mm diameter
- Bobbin size 63 x 200mm = 547ccm
- Motor power: 0,37kw per head
- Speed: 330r.p.m.
- Noise level: < 85dB



SENG 1/40-140

Rope braiding machine for 8 – 25mm diameter

- 40 carriers
- Take-off disc: 500mm diameter
- Bobbin size 78 x 280mm = 1211ccm
- Motor power: 1,5kw
- Speed: 235r.p.m.
- Noise level: < 90dB



SE 1/12-528


Rope braiding machine for 10 – 60mm diameter

- 12 carriers
- Take-off disc: 700mm diameter
- Bobbin size 290 x 640mm = 40464ccm
- Motor power: 3,0kw
- Speed: 40r.p.m.
- Electronic lay length control
- Noise level: < 85dB

SENG 1/32-160

Rope braiding machine for 9 – 32mm diameter

- 32 carriers
- Take-off disc: 500mm diameter
- Bobbin size 87 x 320mm = 1732ccm
- Motor power: 1,5kw
- Speed: 200r.p.m.
- Noise level: < 85dB

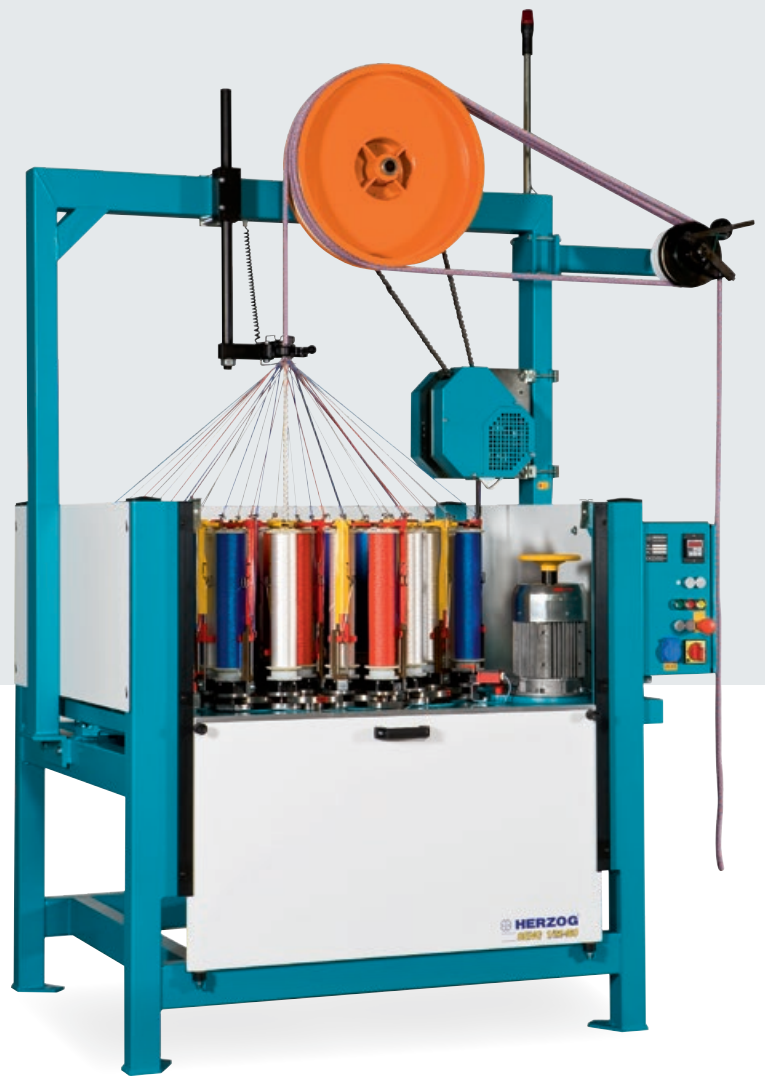

SE 1/16-266

Rope braiding machine for 6 – 25mm diameter

- 16 carriers
- Take-off disc: 500mm diameter
- Bobbin size 290 x 640mm = 40464ccm
- Motor power: 1,5kw
- Speed: 110r.p.m.
- Noise level: < 85dB

Pitch	size Carrier no.	Bobbin size	Speed
80mm	3 – ∞	42 x 110mm = 125ccm 42 x 130mm = 148ccm	300r.p.m.
100mm	8 – ∞	55 x 130mm = 265ccm 55 x 170mm = 346ccm	250r.p.m.
120mm	3 – ∞	63 x 200mm = 547ccm	330r.p.m..
140mm	8 – ∞	78 x 280mm = 1211ccm	235r.p.m.
160mm	8 – ∞	87 x 320mm = 1732ccm	200r.p.m.
224mm	3 – 48	115 x 380mm = 3581ccm	110r.p.m.
266mm	8 – 48	135 x 380mm = 5074ccm	110r.p.m.
336mm	8 – 48	190 x 500mm = 13271ccm	60r.p.m.
432mm	8 – 48	250 x 640mm = 29606ccm	48r.p.m.
528mm	8 – 48	290 x 640mm = 40464ccm	40r.p.m.
660mm	12 – 48	350 x 700mm = 65369ccm	33r.p.m.
720mm	8 – 48	390 x 800mm = 93305ccm	30r.p.m.
1088mm	8 – 32	560 x 900mm = 213426ccm	24r.p.m.
1500mm	8 – 12	800 x 1200mm = 382764ccm	15r.p.m.
2000mm	8 – 12	1000 x 1500mm = 1133758ccm	9r.p.m.

Herzog GmbH

Am Alexanderhaus 160 · D-26127 Oldenburg

T: +49 (0) 4 41 / 30 08 - 0 · F: +49 (0) 4 41 / 30 08 - 100

info@herzog-online.com · www.herzog-online.com